



产品图片



使用场景

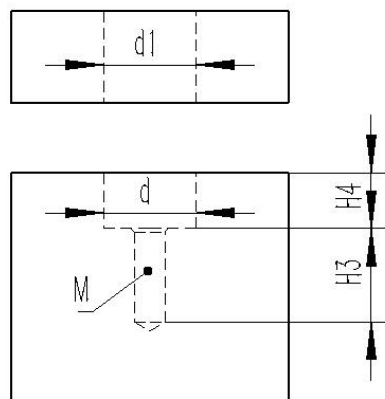

选型示意图

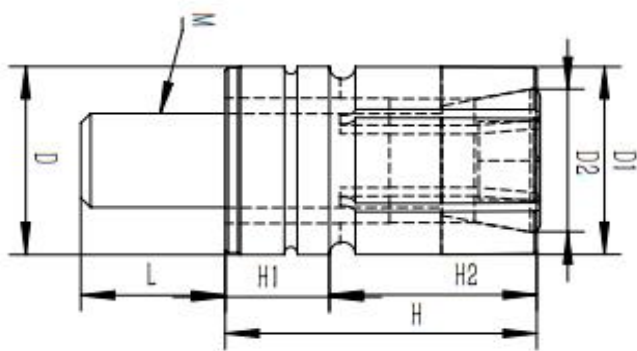

选型参数表

型 号	d (H7)	M	H ₂	H ₃	d ₁ (+0.25/-0.15)注1)
SF-PEPP06	6	M3×0.5	8	6	6
SF-PEPP10	10	M4×0.7	9	6.5	10
SF-PEPP12	12	M6×1	12		12
SF-PEPP16	16	M8×1.25	14		16

本体	圆锥螺栓
SUS630	强度类别 12.8
HRC34	HRC37

型 号	D ₁	D ₂	H ₂	D (.8.025)	H ₁	H	M	L max.	W	夹紧力 (kN)	容许紧固扭矩 N·m)
SF-PEPP06	6	5.5	7	6	5.8	13	M3×0.5	7.3	2.5	2.2	2.7
SF-PEPP10	10	7.5	12.7	10	6.3	19	M4×0.7	8.4	3	4.2	6.3
SF-PEPP12	12	10.5		12			M6×1	11.1	5	8.4	22
SF-PEPP16	16	12		16			M8×1.25	13	6	11	52

型 号	自行加工时的 推荐 扩张直径	容许扩张 直径	质量 (g)	重复 定位精度
SF-PEPP06	0.04~0.07	0.18	3	0.025
SF-PEPP10		0.23	10	0.025
SF-PEPP12		0.28	17	0.025
SF-PEPP16		0.32	27	0.025